


# NV156FHM-N41 Preliminary Product Specification Rev. P1

HEFEI XINSHENG OPTOELECTRONICS TECHNOLOGY CO.,LTD

京东方		PRODUCT GROUP	REV	ISSUE DATE		
	BOE	TFT- LCD PRODUCT	P1	2014.10.17		
SPEC.	NUMBER	SPEC. TITLE		PAGE		
		NV156FHM-N41 Preliminary Product Sp	pecification	2 <b>OF 33</b>		
REV.	ECN No.	DESCRIPTION OF CHANGES	PREPARED			
P0	-	Initial Release	2014.09.11	杨通		
P1	-	Update EDID & Label information	2014.10.17	杨通		
			<b>*</b>			

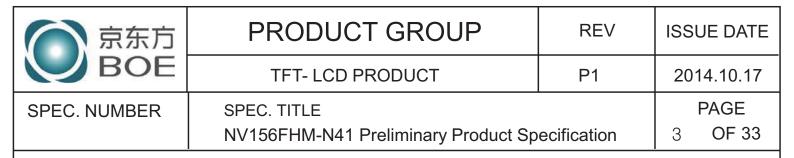

# **Contents**


No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Input Signals, Display Colors & Gray Scale of Colors	20
8.0	Power Sequence	21
9.0	Connector description	22
10.0	Mechanical Characteristics	23
11.0	Reliability Test	24
12.0	Handling & Cautions.	24
13.0	Label	25
14.0	Packing information	27
15.0	Mechanical Outline Dimension	28
16.0	EDID Table	30

京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NV156FHM-N41 Preliminary Product Sp	4 OF 33	

#### 1.0 GENERAL DESCRIPTION

#### 1.1 Introduction

NV156FHM-N41 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

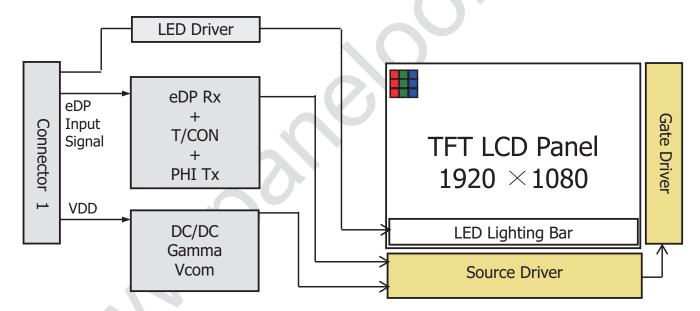

#### 1.2 Features

- 2 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	2014.10.17	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NV156FHM-N41 Preliminary Product Sp	5 <b>OF 33</b>	

# 1.3 Application

Notebook PC (Wide type)

## 1.4 General Specification

The followings are general specifications at the model NV156FHM-N41. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	344.16 (H) ×193.59 (V)	mm	
Number of pixels	1920 (H) ×1080 (V)	pixels	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally Black		
Dimensional outline	359.5(H)*223.8(V) (W/PCB)*3.2(Max)	mm	
Weight	380 (max)	g	
Surface treatment	AG		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P□ : 1.6 (max)	W	
	Рв. :2.98(max)	W	
	Ptotal :4.58(max)	W	

Notes: 1. LED Lighting Bar (40\*LED Array)

5



京东方	PRODUCT GROUP	REV	ISSUE DATE	
BOE	TFT- LCD PRODUCT	P1	2014.10.17	
SPEC. NUMBER	EC. NUMBER SPEC. TITLE			
	NV156FHM-N41 Preliminary Product Sp	6 <b>OF 33</b>		

## 2.0 ABSOLUTE MAXIMUM RATINGS

Global LCD Panel Exchange Center


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings>

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V <sub>DD</sub>	-0.3	4.0	V	Note 1
Logic Supply Voltage	V <sub>IN</sub>	V <sub>ss</sub> -0.3	V <sub>DD</sub> +0.3	V	Note i
Operating Temperature	T <sub>OP</sub>	0	+50	$^{\circ}\!$	Note 2
Storage Temperature	T <sub>ST</sub>	-20	+60	$^{\circ}$	Note 2

- Notes: 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
  - 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. ( 40 °C ≥ Ta) Maximum wet - bulb temperature at 39  $^{\circ}$ C or less. (Ta > 40  $^{\circ}$ C) No condensation.

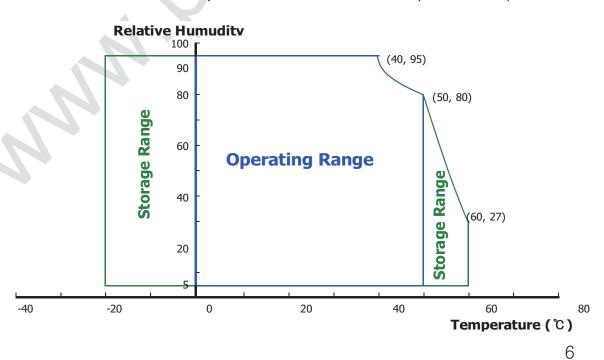



京东方	京东方 PRODUCT GROUP REV				
BOE	TFT- LCD PRODUCT	P1	2014.10.17		
SPEC. NUMBER	SPEC. TITLE	PAGE			
	NV156FHM-N41 Preliminary Product Sp	7 OF 33			

#### 3.0 ELECTRICAL SPECIFICATIONS

# 3.1 Electrical Specifications

Global LCD Panel Exchange Center

< Table 3. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	V <sub>DD</sub>	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	$V_{RF}$	-		100	mV	At V <sub>DD</sub> = 3.3V
Power Supply Current	I <sub>DD</sub>	0	TBD	-	mA	Note 1
Differential Input Voltage	V <sub>ID</sub>	200	-	600	mV	
	P <sub>D</sub>	-	1.0	1.6	W	Note 1
Power Consumption	P <sub>BL</sub>	-	-	2.98	W	Note 2
	P <sub>total</sub>	-	-	4.58	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for 3.3V at 25 ℃.

a) Typ : Mosaic Pattern b) Max : R/G/B Pattern



2. Calculated value for reference (VLED  $\times$  ILED)

7



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P1		2014.10.17
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NV156FHM-N41 Preliminary Product Sp	8 <b>OF 33</b>	

# 3.2 Backlight Unit

Global LCD Panel Exchange Center

< Table 4. LED Driving guideline specifications >

Ta=25+/-2°C

Table 4. LED Driving guideline specifications > Ta=25+/-2 C							
	Parameter		Min.	Тур.	Max.	Unit	Remarks
LED Forward	l Voltage	V <sub>F</sub>	-	1	3.0	V	-
LED Forward	Current	I <sub>F</sub>	-	21.6	-	mA	-
LED Power C	Consumption	P <sub>LED</sub>		-	2.98	W	Note 1
LED Life-Tim	е	N/A	15,000		-	Hour	I <sub>F</sub> = 20mA
Power supply LED Driver	Power supply voltage for LED Driver		5	12	21	V	
EN Control	Backlight on		2.5		5.0	V	
Level	Backlight off		0		1.0	V	
PWM Control	PWM High Level		2.5		5.0	V	
Level	PWM Low Level		0		0.1	V	
PWM Control Frequency		F <sub>PWM</sub>	100	-	10,000	Hz	
Duty Ratio		-	1	-	100	%	Note3


Notes: 1. Power supply voltage 12V for LED Driver Calculator Value for reference IF  $\times$  VF  $\times$  40 / efficiency = PLED

- 2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.
- 3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	2014.10.17	
SPEC. NUMBER	SPEC. TITLE NV156FHM-N41 Preliminary Product Sp	PAGE 9 OF 33	

## 3.3 LED structure

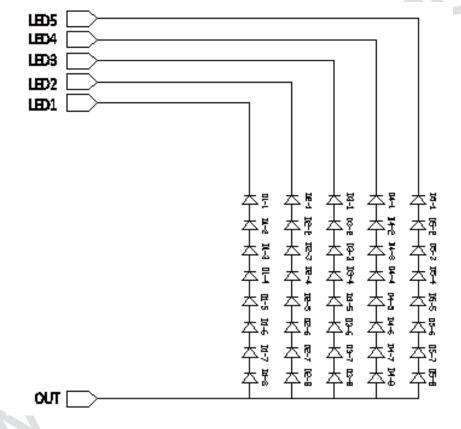



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	10 <b>OF 33</b>	

# 4.0 OPTICAL SPECIFICATION

#### 4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25\pm2^{\circ}$ C) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^{\circ}$ . We refer to  $\theta = 0$  (=03) as the 3 o'clock direction (the "right"),  $\theta = 90$  (=012) as the 12 o'clock direction ("upward"),  $\theta = 180$  (=09) as the 9 o'clock direction ("left") and  $\theta = 270$  (=06) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\theta$ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at 25°C. Optimum viewing angle direction is 6 'clock.

# 4.2 Optical Specifications

<Table 5. Optical Specifications>

Table 5. Optical opecifications								
Parame	eter	Symbol	Condition	Min.	Тур.	Max.	Unit	Remark
	Horizontal	$\Theta_3$		-	85	-	Deg.	
Viewing Angle	Horizontal	$\Theta_9$	CR > 10	-	85	-	Deg.	Note 1
range	Vertical	Θ <sub>12</sub>	CK > 10	-	85	-	Deg.	Note
	vertical	$\Theta_6$		-	85	-	Deg.	
Luminance Co	ntrast ratio	CR	Θ = 0°	-	800			Note 2
Luminance of White	5 Points	Y <sub>w</sub>	Θ = 0°	-	220	ı	cd/m <sup>2</sup>	Note 3
White	5 Points	ΔΥ5	ILED = 21.6mA	80	-	-		
Luminance uniformity	13 Points	ΔΥ13	2.101111	65	-	-		Note 4
White Chro	White Chromaticity		Θ = 0°	0.283	0.313	0.343		Note 5
vvriite Chro	maticity	y <sub>w</sub>	0 - 0	0.299	0.329	0.359		Note 5
	Red	X <sub>R</sub>			0.590			
		y <sub>R</sub>		-0.03	0.350			
Reproduction	Green	X <sub>G</sub>	⊝ = 0°		0.330	+0.03		
of color		y <sub>G</sub>		-0.03	0.555	10.03		.
	Blue	X <sub>B</sub>			0.153			
	Dide	y <sub>B</sub>			0.119			
Gamut					45		%	
Response Time (Rising + Falling)		T <sub>RT</sub>	Ta= 25° C Θ = 0°	-	30	35	ms	Note 6
Cross T	alk	CT	⊝ = 0∘	-	-	2.0	%	Note 7

10



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P1		2014.10.17
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NV156FHM-N41 Preliminary Product Sp	11 OF 33	

#### Notes:

- 1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
- 2. Contrast measurements shall be made at viewing angle of  $\Theta$ = 0 and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state.


(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

- 3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
- 4. The White luminance uniformity on LCD surface is then expressed as : ΔY =Minimum Luminance of 5(or 13) points / Maximum Luminance of 5(or 13) points. (see FIGURE 2 and FIGURE 3).
- 5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- 6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.
- 7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See FIGURE 5).

京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	12 <b>OF 33</b>	


## 4.3 Optical measurements

Figure 1. Measurement Set Up

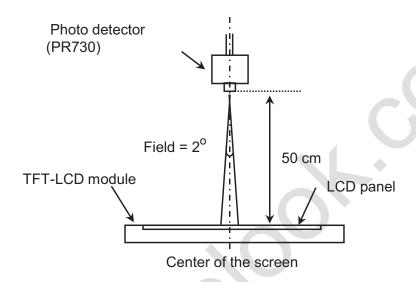

Optical characteristics measurement setup

Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

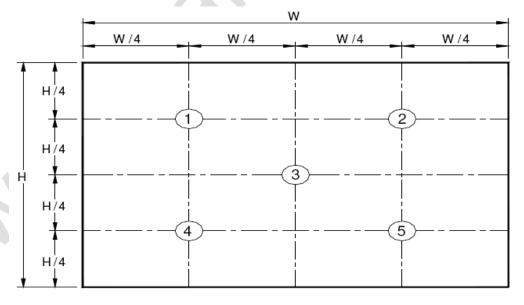


Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

Global LCD Panel Exchange Center




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	13 <b>OF 33</b>	

Figure 3. Uniformity Measurement Locations (13 points)

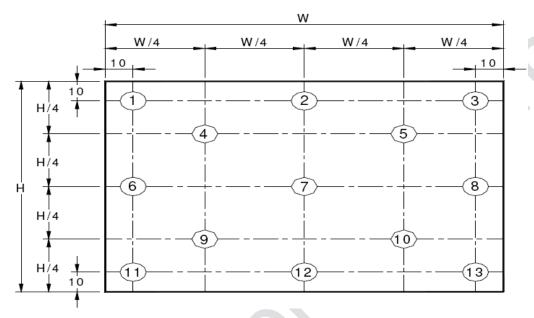

The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y5 =$ Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2), ΔY13 = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).

Figure 4. Response Time Testing

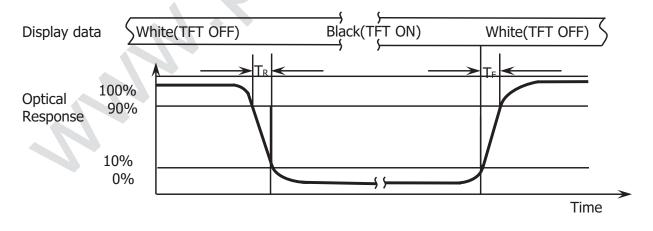


The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td and 90% to 10% is Tr.

Global LCD Panel Exchange Center



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	14 OF 33	

Figure 5. Cross Modulation Test Description

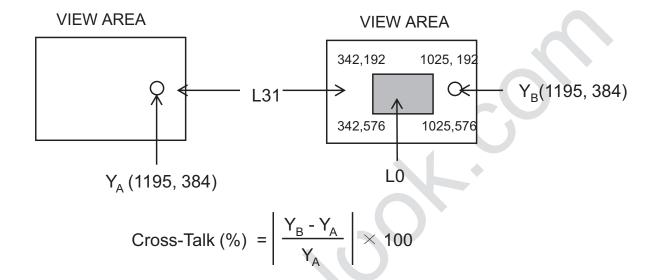


Where:

 $Y_A$  = Initial luminance of measured area (cd/m<sup>2</sup>)

Y<sub>B</sub> = Subsequent luminance of measured area (cd/m<sup>2</sup>) The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

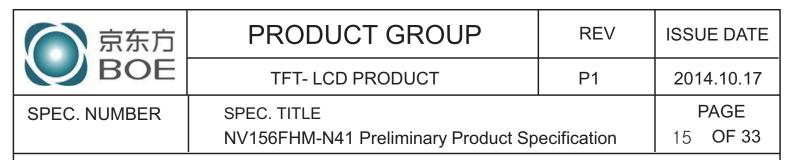

# 5.0 INTERFACE CONNECTION.


#### **5.1 Electrical Interface Connection**

The electronics interface connector is UJU IS050-L30B-C10 or Compatible.

The connector interface pin assignments are listed in Table 6.


<Table 6. Pin Assignments for the Interface Connector>

Pin No.  1 2 3 4 5	Symbol Symbol CABC_ENABLE H_GND LANE1_N LANE1_P H GND	Functions  Description  Test enable  Ground  eDP RX channel 1 negative  eDP RX channel 1 positive
1 2 3 4 5	CABC_ENABLE H_GND LANE1_N LANE1_P	Test enable Ground eDP RX channel 1 negative
2 3 4 5	H_GND LANE1_N LANE1_P	Ground eDP RX channel 1 negative
3 4 5	LANE1_N LANE1_P	eDP RX channel 1 negative
4 5	LANE1_P	
5		
		Ground
6		
7	LANEO_N	eDP RX channel 0 negative
	LANE0_P	eDP RX channel 0 positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH positive
10	AUX_CH_N	eDP AUX CH negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	LCD_Self_Test	Panel self test enable
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot plug detect output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_ENABLE	LED enable pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	Hsync	预留Hsync, 暂不开启
25	NC	No Connection
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL POWER	LED Power Supply 5V-21V
29	BL POWER	LED Power Supply 5V-21V
30	NC	No Connection

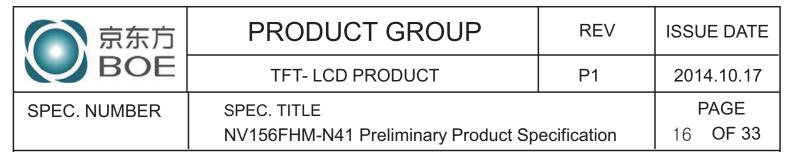

#### 5-2. eDP Interface

Global LCD Panel Exchange Center

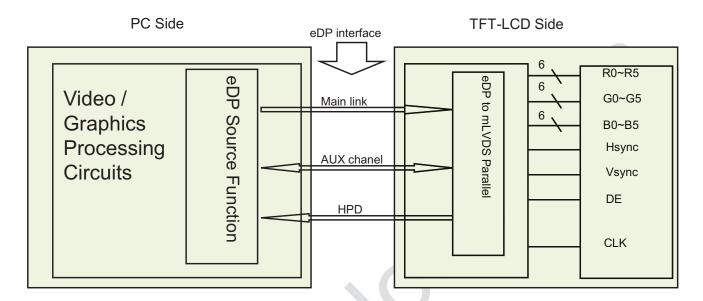

Note. Transmitter: NT71895QG or equivalent.

Transmitter is not contained in Module.

## 5.3.eDP Input signal

Lane 0					
R0-5:0	G0-5:4				
G0-3.0	B0-5:2				
B0-1:0	R1-5:0				
G1-5:0	B1-5:4				
B1-3:0	R2-5:2				
R2-1:0	G2-5:0				
B2-5:0	R3-5:4				
R3-3:0	G3-5:2				
G3-1:0	B3-5:0				



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P1		2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	17 OF 33	

# 5.4 Back-light & LCM Interface Connection

Interface Connector: CRT F10401-1092

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	LED cathode connection	6	NC	No Connection
2	LED2	LED cathode connection	7	NC	No Connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	LED4	LED cathode connection	9	Vout	LED anode connection
5	LED5	LED cathode connection	10	Vout	LED anode connection



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	18 <b>OF 33</b>	

# **6.0 SIGNAL TIMING SPECIFICATION**

# 6.1 The NV156FHM-N41 is operated by the DE only.

Item		Symbols	Min	Тур	Max	Unit
	Frequency	1/Tc	100	141.4	160	MHz
Clock	High Time	Tch	-	4/7	(-)	Tc
	Low Time	Tcl	-	3/7	→ -	Tc
			1090	1100	1238	lines
Frame Period		Tv	-	60	-	Hz
			-	16.7	-	ms
Vertical Display Period		Tvd		1080	-	lines
One line Scanning Period		Th	2080	2142	2400	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note\*: This Module can support low frame refresh rate 50Hz & 40Hz.


京东方	PRODUCT GROUP	DUCT GROUP REV					
BOE	TFT- LCD PRODUCT	TFT- LCD PRODUCT P1					
SPEC. NUMBER	SPEC. TITLE		PAGE				
	NV156FHM-N41 Preliminary Product Sp	ecification	19 <b>OF 33</b>				

# **6.2 eDP Rx Interface Timing Parameter**

The specification of the eDP Rx interface timing parameter is shown in Table 8.


<Table 8. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Тур	Max	Unit	Remark
Spread spectrum clock	SSC		0.5		%	
Differential peak-to-peak input volt age at package pins	VRX-DIFFp-p	100	0	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	100	Ω	
Single-ended termination resistance	RRX-SE	40		60	Ω	
Rx short circuit current limit	IRX_SHORT	-		20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_ INTRA_PAIR	(0)	-	150	ps	

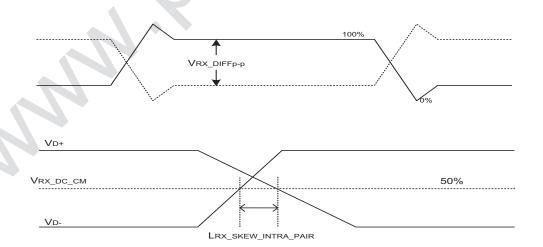

19



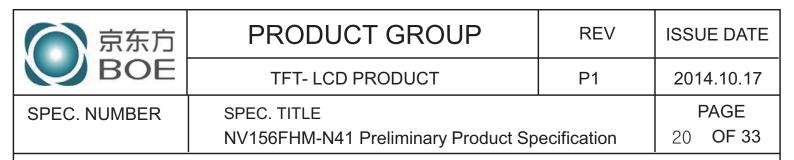

# 7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors &		Data signal	
	Gray scale	R0 R1 R2 R3 R4 R5	G0 G1 G2 G3 G4 G5	B0 B1 B2 B3 B4 B5
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1 1 1 1
Basic	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0 0 0 0
colors	Light Blue	0 0 0 0 0 0	1 1 1 1 1 1	1 1 1 1 1 1
	Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	Purple	1 1 1 1 1 1	0 0 0 0 0 0	1 1 1 1 1 1
	Yellow	1 1 1 1 1 1	1 1 1 1 1 1	0 0 0 0 0 0
	White	1 1 1 1 1 1	1 1 1 1 1 1	1 1 1 1 1 1
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Δ	1 0 0 0 0 0	0 0 0 0 0	0 0 0 0 0 0
	Darker	0 1 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
Gray scale of Red	$\triangle$	<u> </u>		<b>↑</b>
oi Reu	Brighter	1 0 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0
		0 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	△	0 0 0 0 0 0	1 0 0 0 0 0	0 0 0 0 0 0
	Darker	0 0 0 0 0 0	0 1 0 0 0 0	0 0 0 0 0 0
Gray scale		<b>00000</b>	↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ <b>↑</b>	
of Green	$\nabla$		<b>\</b>	$\downarrow$
	Brighter	0 0 0 0 0 0	1 0 1 1 1 1	0 0 0 0 0 0
	$\nabla$	0 0 0 0 0 0	0 1 1 1 1 1	0 0 0 0 0 0
	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0 0 0 0
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Δ	0 0 0 0 0 0	0 0 0 0 0 0	1 0 0 0 0 0
	Darker	0 0 0 0 0 0	0 0 0 0 0 0	0 1 0 0 0 0
Gray scale of Blue	$\Delta$	<u> </u>	<b>\</b>	<b>↑</b>
Of Blue	Brighter	0 0 0 0 0 0	0 0 0 0 0 0	1 0 1 1 1 1
	Drigitter	0 0 0 0 0 0	0 0 0 0 0 0	0 1 1 1 1 1
	Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1 1 1 1
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
Gray		1 0 0 0 0 0	1 0 0 0 0 0	1 0 0 0 0 0
scale	Darker	0 1 0 0 0 0	0 1 0 0 0 0	0 1 0 0 0 0
of		<u> </u>	<u> </u>	^
White	$\nabla$	<u></u>	<u> </u>	<u> </u>
&	Brighter	1 0 1 1 1 1	1 0 1 1 1 1	1 0 1 1 1 1
Black	$\nabla$	0 1 1 1 1 1	0 1 1 1 1 1	0 1 1 1 1 1
	White	1 1 1 1 1 1	1 1 1 1 1 1	1 1 1 1 1 1

20




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	ecification	21 <b>OF 33</b>

## 8.0 POWER SEQUENCE

Global LCD Panel Exchange Center

To prevent a latch-up or DC operation of the LCD module, the power on/off seq uence shall be as shown in below

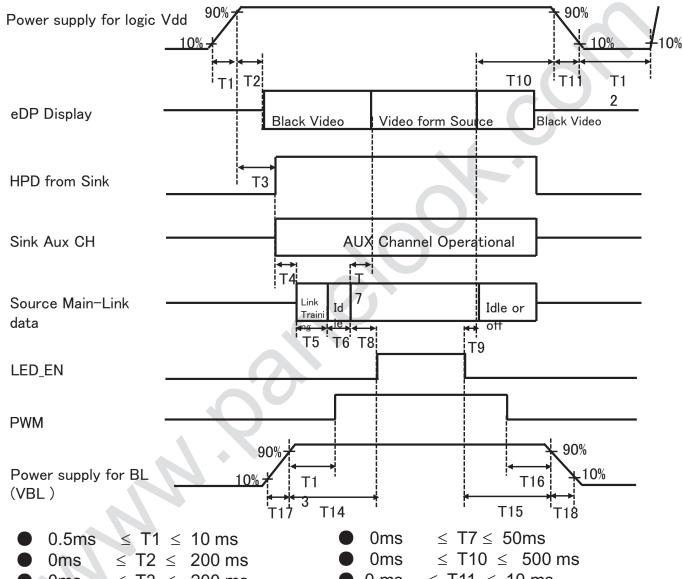


- ≤ T3 ≤ 200 ms 0ms
- ≤ T13 0ms
- 0ms ≤ T14
- 0ms ≤ T17

- 0 ms  $\leq$  T11  $\leq$  10 ms
- ≤ T12 150ms
- ≤ T15 0ms
- 0<sub>ms</sub> ≤ T16
- ≤ T18 0ms

# Notes:

- 1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- 2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

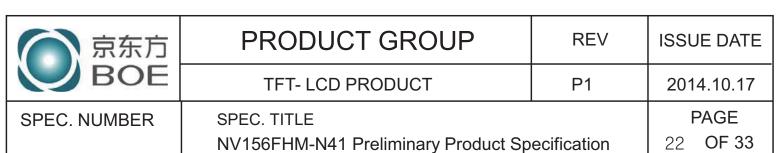

# 9.0 Connector Description

Physical interface is described as for the connector on LCM. These connectors are capable of accommodating the following signals and will be following components.

#### 9.1 TFT LCD Module

For Signal Connector
UJU or Compatible
IS050-L30B-C10 or Compatible
I-PEX 20454-030T or Compatible



京东方	PRODUCT GROUP	REV	ISSUE DATE						
BOE	TFT- LCD PRODUCT	P1	2014.10.17						
SPEC. NUMBER	SPEC. TITLE		PAGE						
	NV156FHM-N41 Preliminary Product Sp	NV156FHM-N41 Preliminary Product Specification							

# **10.0 MECHANICAL CHARACTERISTICS**

#### **10.1 Dimensional Requirements**

Global LCD Panel Exchange Center

FIGURE 6 shows mechanical outlines for the model NV156FHM-N41. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.16 (H) ×193.59(V)	
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm
Pixel arrangement	RGB Vertical stripe	
Display colors	262K	
Display mode	Normally Black	
Dimensional outline	359.5(H)*223.8(V) (W/PCB)*3.2(Max)	mm
Weight	380(Max)	gram
Pools Light	Connector : CRT F10401-1092	
Back Light	LED, Horizontal-LED Array type	

# 10.2 Mounting

See FIGURE 6.

#### 10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an AG coating to minimize reflection and a coating to reduce scratching.

#### 10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

23

A4(210 X 297) R2010-6053-O(3/3)



京东方	PRODUCT GROUP	REV	ISSUE DATE			
BOE	TFT- LCD PRODUCT	P1	2014.10.17			
SPEC. NUMBER	SPEC. NUMBER SPEC. TITLE					
	NV156FHM-N41 Preliminary Product Sp	ecification	24 <b>OF 33</b>			

### 11.0 RELIABILITY TEST

Global LCD Panel Exchange Center

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 ℃, 240 hrs
2	Low temperature storage test	Ta = -20 ℃, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 ℃, 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 ℃, 240 hrs
5	Low temperature operation test	Ta = 0 ℃, 240 hrs
6	Thermal shock	Ta = -20 $^{\circ}$ C $\leftrightarrow$ 60 $^{\circ}$ C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	1.5G, 10~500Hz,Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec $\pm$ X, $\pm$ Y, $\pm$ Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

#### 12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
  - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
  - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
  - As the LCD panel and back light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
  - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
  - Do not pull the interface connector in or out while the LCD module is operating.
  - Put the module display side down on a flat horizontal plane.
  - Handle connectors and cables with care.
- (3) Cautions for the operation
  - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
  - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged. 24

A4(210 X 297) R2010-6053-O(3/3)



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE		PAGE
	NV156FHM-N41 Preliminary Product Sp	ecification	25 <b>OF 33</b>

# (4) Cautions for the atmosphere

Global LCD Panel Exchange Center

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

#### (5) Cautions for the module characteristics


- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

#### (6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

#### **13.0 LABEL**


(1) MDL label

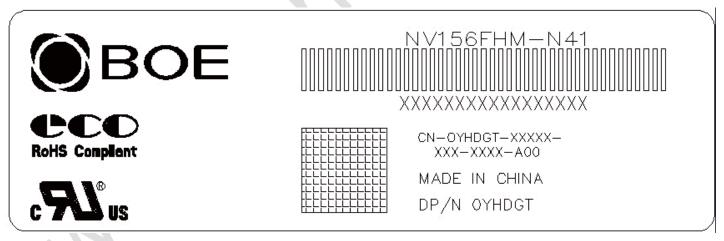

Code Digit	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	S	L	s	5	1	2	3	5	9	4	2	0	0	0	1	D	В
Description		I Code BN	Grad e	Line	Y	ear	Mont h			ension its Of F				Seri 00001-	ZZZZZ	Z	

25



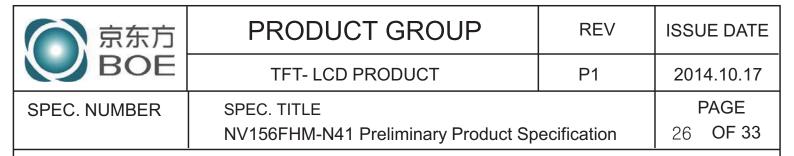

#### (2) High voltage caution label



#### HIGH VOLTAGE CAUTION

RISK OF ELECTRIC SHOCK, DISCONNECT THE ELECTRIC POWER BEFORE SERVICING

COLD CATHODE FLUORESCENT LAMP IN LCD
PANEL CONTAINS A SMALL AMOUNT

OF MERCURY, PLEASE FOLLOW LOCAL ORDINANCES OR REGULATIONS FOR DISPOSAL,

#### (3) Box label

Label Size: 110 mm (L)  $\times$  55 mm (W)

Contents


Model: NV156FHM-N41 Q`ty: Module Q`ty in one box Serial No.: Box Serial No.

Date: Packing Date Internal use of Product




Code Digit	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	s	5	1	2	3	D	0	0	0	6	8
Description	Produc		Grade	Line		ar	Month	Revisio n Code			al No		,

26

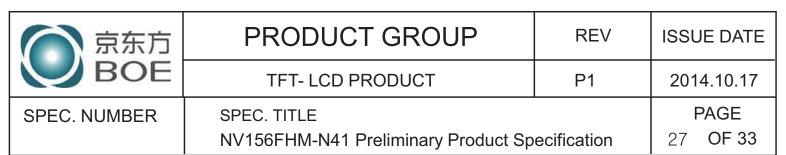

## 15.0 PACKING INFORMATION

#### 15.1 Packing order

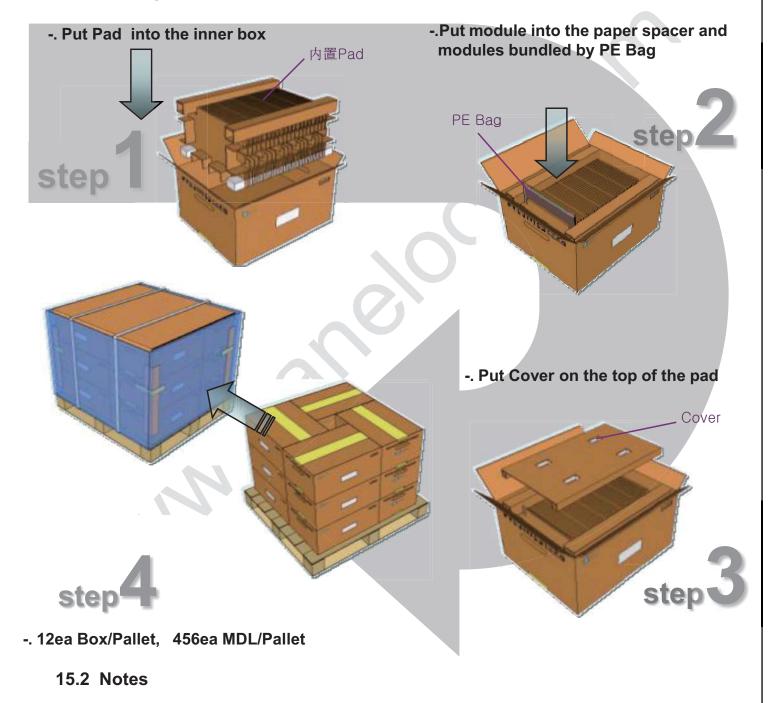

- Box Dimension: 580mm×488mm×303mm
- Package Quantity in one Box:38 pcs
- Total Weight: 19.3kg/Box

27




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	2014.10.17	
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NV156FHM-N41 Preliminary Product Sp	28 <b>OF 33</b>	

# 16.0 MECHANICAL OUTLINE DIMENSION

Global LCD Panel Exchange Center

Figure 6. TFT-LCD Module Outline Dimension (Front View)

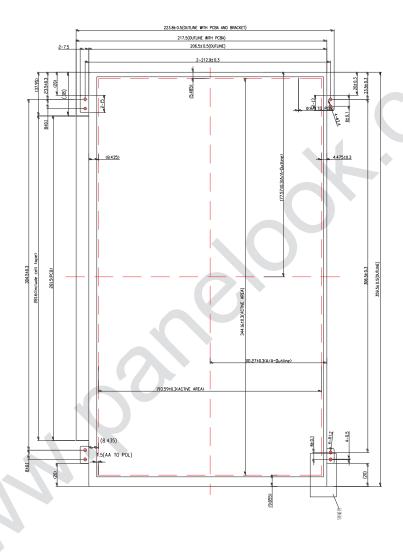



28


A4(210 X 297) R2010-6053-O(3/3)

Global LCD Panel Exchange Center




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P1	2014.10.17
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NV156FHM-N41 Preliminary Product Sp	29 <b>OF 33</b>	

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

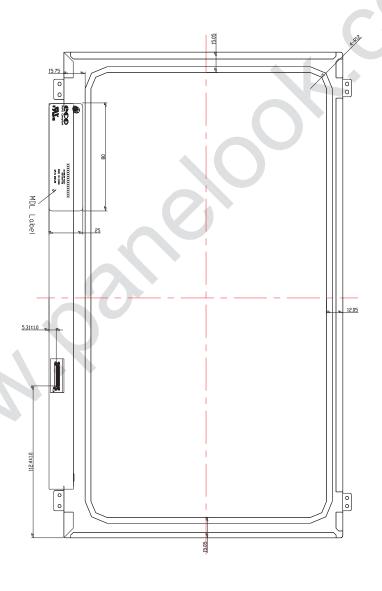



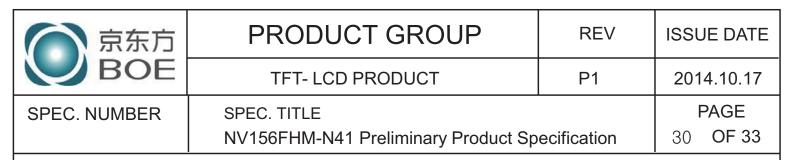

# 17.0 EDID Table

17.0 LD	ID Table					
Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
00		00	0		0	
01		FF	255		255	
02		FF	255		255	
03	lloodor [	FF	255		255	EDID Hondon
04	Header	FF	255		255	EDID Header
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer Name	09	9		<b>P</b> ∩E	ID - POE
09	Manufacturer Name	E5	229		BOE	ID = BOE
0A	ID Droduct Codo	2F	47		1583	ID = 1592
0B	ID Product Code	06	6		1202	ID = 1583
0C		00	0			
0D	32-bit serial No.	00	0			
0E	32-DIL SELIALINO.	00	0			
0F		00	0			
10	Week of manufacture	1	1		1	
11	Year of Manufacture	19	25		2015	Manufactured in 2015
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	95	149		-	
15	Max H image size	22	34		34	34 cm (Approx)
16	Max V image size	13	19		19	19 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	0A	10			RGB display, Preferred Timming mode
19	Red/Green low bits	24	36		_	Red / Green Low Bits
1A	Blue/White low bits	10	16		-	Blue / White Low Bits
1B	Red x high bits	97	151	604	0.59	Red (x) = $10010111 (0.59)$
1C	Red y high bits	59	89	358	0.35	Red (y) = $01011111 (0.35)$
1D	Green x high bits	54	84	337	0.33	Green (x) = $01010100 (0.33)$
1E	Green y high bits	8E	142	568	0.555	Green $(y) = 10001110 (0.555)$
1F	Blue x high bits	27	39	156	0.153	Blue (x) = $001001111 (0.153)$
20	BLue y high bits	1E	30	121	0.119	Blue (y) = $00011110 (0.119)$
21	White x high bits	50	80	320	0.313	White $(x) = 01010000 (0.313)$
22	White y high bits	54	84	336	0.329	White $(y) = 01010100 (0.329)$
23	Established timing 1	00	0	300	-	(0.025)
24	Established timing 2	00	0		-	


30





	144 Teel Fill I Tell I						
Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes	
25	Established timing 3	00	0		-		
26	Chandand timeine #1	01	1			Natiliand	
27	Standard timing #1	01	1			Not Used	
28	Ctandard timing #2	01	1			Not Head	
29	Standard timing #2	01	1			Not Used	
2A	Standard timing #2	01	1			Not Used	
2B	Standard timing #3	01	1			Not osed	
2C	Ctandard timing #4	01	1			Not Used	
2D	Standard timing #4	01	1			Not Used	
2E	Ctandard timing #F	01	1			Not Used	
2F	Standard timing #5	01	1			Not used	
30	Standard timing #6	01	1			Not Used	
31	Standard tilling #6	01	1			Not osed	
32	Standard timing #7	01	1			Not Used	
33	Standard tilling #7	01	1			Not osed	
34	Standard timing #9	01	1			Not Used	
35	Standard timing #8	01	1			NOL OSEG	
36		3C	60		141.40	141.4MHz Main clock	
37		37	55		141.40	171.711112 Main Clock	
38		80	128		1920	Hor Active = 1920	
39		DE	222		222	Hor Blanking = 222	
3A		70	112		-	4 bits of Hor. Active + 4 bits of Hor. Blanking	
3B		38	56		1080	Ver Active = 768	
3C		14	20		20	Ver Blanking = 20	
3D		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking	
3E	Detailed	30	48		48	Hor Sync Offset = 48	
3F	timing/monitor	20	32		32	H Sync Pulse Width = 32	
40	descriptor #1	36	54		3	V sync Offset = 3 line	
41	41 42 43 44 45	00	0		6	V Sync Pulse width: 6 line	
42		58	88		344	Horizontal Image Size = 344 mm (Low 8 bits)	
43		C2	194		194	Vertical Image Size = 194 mm (Low 8 bits)	
44		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size	
45		00	0		0	Hor Border (pixels)	
46		00	0		0	Vertical Border (Lines)	
47		1A	26			Refer to right table	
	-	•	•			31	



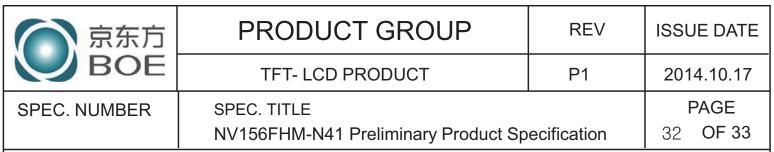


	<u> </u>							
Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes		
48		30	48		113.12	112 12MHz Main clock		
49	1	2C	44		113.12	113.12MHz Main clock		
4A		80	128		1920	Hor Active = 1920		
4B		DE	222		222	Hor Blanking = 222		
4C		70	112		-	4 bits of Hor. Active + 4 bits of Hor. Blanking		
4D		38	56		1080	Ver Active = 768		
4E		14	20		20	Ver Blanking = 20		
4F		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking		
50	Detailed	30	48		48	Hor Sync Offset = 48		
51	timing/monitor	20	32		32	H Sync Pulse Width = 32		
52	descriptor #2	36	54		3	V sync Offset = 3 line		
53		00	0		6	V Sync Pulse width: 6 line		
54		58	88		344	Horizontal Image Size = 344 mm (Low 8 bits)		
55		C2	194		194	Vertical Image Size = 194 mm (Low 8 bits)		
56		10	16	C		4 bits of Hor Image Size + 4 bits of Ver Image Size		
57		00	0		0	Hor Border (pixels)		
58		00	0		0	Vertical Border (Lines)		
59	1	1A	26					
5A		00	0					
5B		00	0					
5C		00	0			ASCII Data Sting Tag		
5D		FE	254					
5E		00	0					
5F		59	89		Y			
60	· Pul	48	72		Н			
61	Detailed	44	68		D	D/PN: YHDGT		
62	Detailed timing/monitor	47	71		G			
63	descriptor #3	54	84		Т			
64	4 5 6 7 8 9	80	128		10000000	EDID:A00		
65		4E	78		N			
66		56	86		V			
67		31	49		1			
68		35	53		5	BOE PN		
69		4E	78		N			
6A		34	52		4			
6B		31	49		1	32		
						(יני		

R2010-6053-O(3/3)

A4(210 X 297)



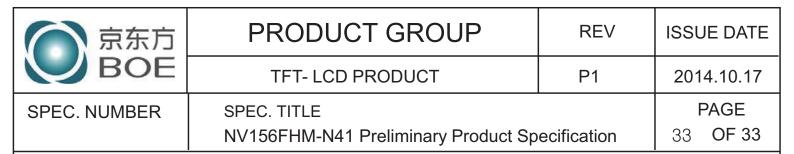

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
6C		00	0			
6D		00	0			
6E		00	0			Product Name Tag (ASCII)
6F		00	0			
70		00	0			Y Y
71		00	0		00000000	6-bit Color Depth & no FRC
72		41	65		01000001	WLED & singal light bar & one light bar
73		11	17		00010001	Frame rate 40Hz~65Hz
74	Detailed	96	150		10010110	Light Controller:PWM & Max. Luminance 220
75	timing/monitor descriptor #4	00	0		00000000	Front Surface:Anti-Glare& RGB v-stripe
76	descriptor " 1	00	0		00010000	with DBC
77		00	0		00000000	no Motion Blur & no Active Gamma
78		00	0		00000000	no Wireless Enhancement & no In-Cell Scanner
79		0A	10		00001010	2 Lane edp1.2
7A		01	1		00000001	Built-In Self Test
7B		0A	10		>	
7C		20	32			
7D		20	32			
7E	Extension flag	00	0			
7F	Checksum	6A	106	106	-	